

ABLEFORGED ALLOY STEEL GRAB HOOKS

with its reinforced saddle for firmer hookups, less wear and with its nearly round section to resist or bending. The **ABLE Grab Hook** is particularly suitable for back - hooking.

Clevis Grab Hook



Narrow gap allows for full engagement in hook to prevent slip-off

Technical Specialities


- Material is highgrade alloysteel (quenched andtempered)
- Used with alloy chain grade 80 for liftingapplication
- Embossed with ABLE Taceability code,WLL & Product Code.
- Working load limit is 4:1
- Proof load is 2.5 times of work load Limit
- Fatigue rated is 1.5 times theWLLat 20,000 cycles
- Clevis opening only allows correct size of Chain to be fitted
- Narrow gap allows for full engagement in hook to prevent slip - off

Eye Grab Hook



No reduction of working load limit, thanks to supporting wings which prevent chain link deformation.

Model: HGC



Alloy Clevis Grab Hook Grade 80Type: HGC

Product Code	For GR80 Chain Dia. (mm)	L mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	WLL 4:1Ton	Weight kg
HGC 006	6	45	8	7.6	42	8	32	21.5	17.7	1.2	0.20
HGC 008	7,8	53.5	10.8	9.0	53	9.5	35	33.5	19	2.0	0.30
HGC 010	10	75	13.5	12.8	71	12.5	42.5	46	29	3.2	0.73
HGC 013	13	91	16.5	15.8	90	15	53	57.5	43	5.4	1.66
HGC 016	16	100	19.2	20.0	113	18.5	65	74	46	8.2	2.80
HGC 020	18,20	135	24	24.3	143	23	77	74	56	12.5	5.00
HGC 022	22	153	27	26.3	160	27	91	90	68.5	15.0	6.30

Alloy Eye Grab Hook Grade 80Type: HGE

Product Code	For GR80 Chain Dia. (mm)	P mm	A mm	G mm	K mm	F mm	WLL 4:1 Ton	Weight kg
HGE 006	6	8	13	8	51	21.5	1.2	0.20
HGE 008	7,8	10	18	9	60	30	2.0	0.30
HGE 010	10	13	20	13	80	46	3.2	0.65
HGE 013	13	16	25	15	100	57.5	5.4	1.30
HGE 016	16	19	30	20	106.5	72	8.2	2.10
HGE 020	18,20	24	37.5	23	140	74	12.5	4.40
HGE 022	22	27	44	26	165	90	15.0	8.20

ABLEFORGED ALLOY STEEL SLING HOOKS



The **Ableforged Sling Hook** is a versatile, general purposed hook suitable for most slinging applications and has the added advantage of safety latch kits, readily available, for converting it into an **Ableforge safety hook**.

Eye Sling Hook



The Spring is made of Stainless Steel Material to prevent rust

Model: HES

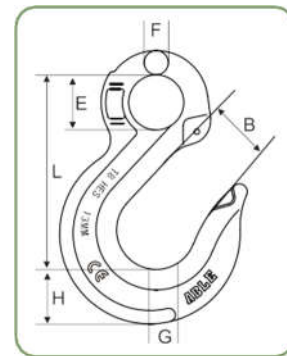

Technical Specialities

- Material is forgedalloy steel (quenched and tempered)
- Large throat opening
- Anti - fouling due to carefully designed contours.
- Used with alloy chain grade 80 and wire rope for lifting application
- Embossed with ABLE, traceability,WLL,Batch Number and Size
- 100% 2.5 times of capacity proof load tested
- Ultimate load is 4 times of capacity
- Fatigue rated is 1.5 times theWLLat 20,000 cycles

Clevis Sling Hook



Clevis opening only allows correct size of chain to be fitted. Latch incorporated to provide additional lifting safety and the spring is made of Stainless Steel Material to prevent rust.

Model: HCS

ALLOY EYE SLING HOOK GRADE 80 TYPE: HES

Product Code	For GR80 Chain Dia. (mm)	L mm	B mm	E mm	F mm	G mm	H mm	WLL 4:1 Ton	Weight kg
HES 006	6	80	20.5	20	9	13.5	19	1.2	0.3
HES 008	7,8	98	26	25	11	18	24	2.0	0.4
HES 010	10	120	26	38	15	22	32	3.2	0.9
HES 013	13	152	39	43	19	32	42	5.4	2.0
HES 016	16	185	40	50	23	36	46	8.2	3.0
HES 020	18,20	219	43	62	24	42	58	12.5	5.8
HES 022	22	241	68	62	32	44	75.5	15.0	9.2
HES 026	26	279	82	64	35	60	88	20.6	13.1

ALLOY CLEVIS SLING HOOK GRADE 80 TYPE: HCS

Product Code	For GR80 Chain Dia. (mm)	L mm	B mm	C mm	D mm	E mm	F mm	H mm	WLL 4:1 Ton	Weight kg
HCS 006	6	76	26	7.6	35	8.0	32.0	20.5	1.2	0.35
HCS 008	7,8	94	29	9.0	37	9.5	37.0	22.0	2.0	0.56
HCS 010	10	111	39	12.7	46	13.0	49.0	29.5	3.2	1.07
HCS 013	13	139	47	16.0	56	16.5	56.5	38.0	5.4	1.88
HCS 016	16	163	55	21.0	60	18.5	74.0	48.6	8.2	3.47
HCS 020	18,20	198	61	24.0	79	24.0	81.5	71.0	12.5	7.42